
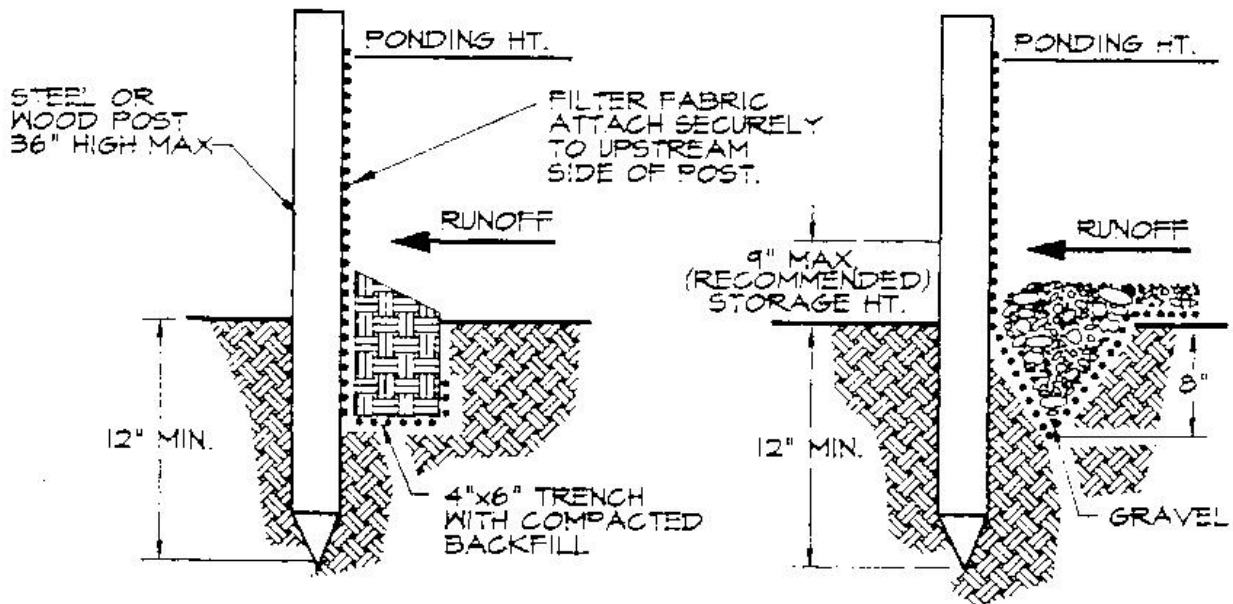


EXTRA STRENGTH FILTER FABRIC
NEEDED WITHOUT WIRE MESH SUPPORT

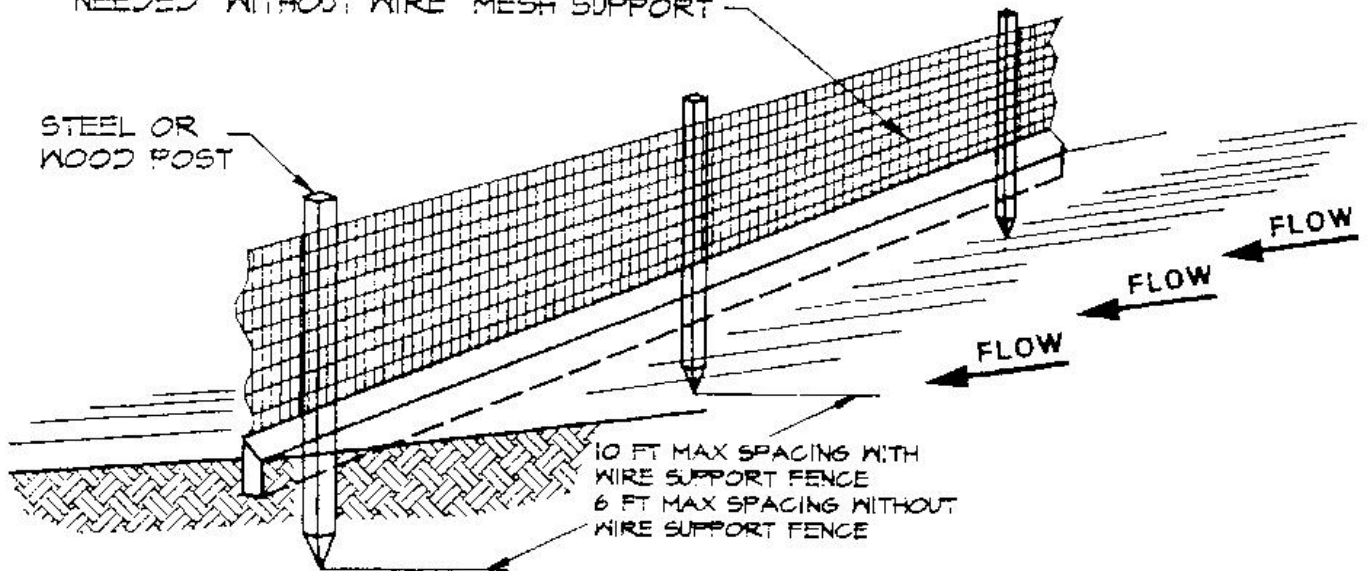

STANDARD DETAIL

TRENCH WITH NATIVE BACKFILL

ALTERNATE DETAIL

TRENCH WITH GRAVEL

NOTE:

1. INSPECT AND REPAIR FENCE AFTER EACH STORM EVENT AND REMOVE SEDIMENT WHEN NECESSARY.
2. REMOVED SEDIMENT SHALL BE DEPOSITED TO AN AREA THAT WILL NOT CONTRIBUTE SEDIMENT OFF-SITE AND CAN BE PERMANENTLY STABILIZED.
3. SILT FENCE SHALL BE PLACED ON SLOPE CONTOURS TO MAXIMIZE PONDING EFFICIENCY.

Silt Fence